

Tips regarding the DT-1000.

**Single DT-1000.** If you ordered one guzzler, the bolts are usually fully installed. Please check to see if they are tight and secure.

**Bolt Assembly.** Here you received one guzzler assemble and then nested inside a second, unassembled unit. You'll need to:


- Locate the bag of parts consisting of nuts, bolts and washers.
- Install the crossbar under the sidewall frame. Point cross-bar angle-iron down. (See image below)
- Place lid on tank. Install the bolts, nuts and washers.
- Replace any vented plugs that were dislodged. (used to keep bees out of tank)

Note: Separating two bottom tanks can be done by either 1) (easiest) tipping the guzzlers on their side and pulling apart or 2) installing some eye-bolts and hoisting it out. (see lid insert note below)

**Lifting and Anchor Points.** There are several inserts that can be used as anchor or lifting points. Here you can securely install a eye-bolt or std bolt in the 3/8" or 1/2" metal insert.

**Caution:** When lifting, the tank should be empty and safety precautions should be taken in the event that the insert does fail.

Please use a sling for airlifting the guzzler.

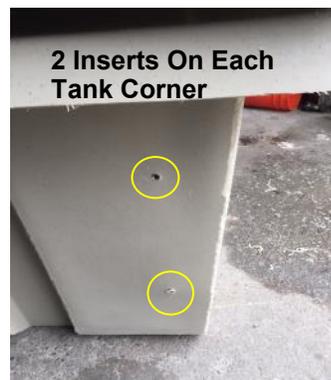

**Locate Parts Bag**  
Open hatch to find the bag of bolts, nuts, washers and extra vented hole plugs.



**Install Cross-Bar**  
Be sure to point the angle iron down.



### Installing Guzzler

**Above Ground Site.** Prepare a flat, level pad and remove any sharp rocks or sticks. To secure the guzzler in place against high winds, use any of the anchor points described above. Then attach to a post, or chain to a block.

**In-Ground Installation.** Install the guzzler in a location that has proper drainage and is not subject to flash-flooding. Highly saturated soil can cause even a full guzzler to pop out of the ground. If necessary, anchor the guzzler to a cement footing or use a block and chain.

**Back-filling.** It's best to partially fill the tank with water before backfilling. This will create some back-pressure and keep the sidewalls from bowing inward.

- Use clean back-fill without sharp rocks or stocks.
- Backfill loosely. Don't aggressively compact.

Please give us a call if you have any questions. Tim Sullivan—Rainmaker Wildlife 360-739-6361